

Unicast Delivery Delay Study for MANET with Erasure Coding and F-Cast Relay

Dr. V. Jayaraj^{#1}, Mrs.S.Hemalatha^{*2}, A. Revathi^{#3}

[#] Associate Professor, Department Of Computer Science And Engineering,
Bharathidasan University, Trichy

^{*} Research Scholar, Department of Computer Science,
Bharathidasan University, Trichy.

^{#3} Research Scholar, Department of Computer Science
Shrimati Indira Gandhi College, Trichy, Tamilnadu, India

Abstract—The Mobile Ad Hoc Networks (MANETs) are a class of framework less self-sorting out systems comprising of cell phones speaking with each other over shared remote connections. Because of their particular elements of power, self-association, brisk organization and reconfiguration, MANETs hold awesome guarantees for some vital application situations, similar to calamity alleviation, war zone interchanges, and wide territory detecting, and are along these queues progressively turning into a basic segment for the people to come (5G) systems. To productively bolster these basic applications with stringent execution prerequisites, it is of awesome significance to altogether comprehend the key execution of such systems, similar to the Delivery delay and throughput limit. This paper concentrates on the execution investigations of an essential class of MANET's with eradication coding and packet excess (f-cast) i.e each coded packet at source node is transmitted to at most f unmistakable transfer nodes. This paper, gives a unicast Delivery delay study with deletion coding and packet excess.

Keywords— Mobile Ad Hoc Networks (MANET), Packet Delivery Delay, Packet Redundancy, Unicast.

I. INTRODUCTION

A considerable measure of work has been devoted to the investigation of packet Delivery delay under unicast activity design by utilizing either eradication coding or packet repetition system in MANETs. It was initially exhibited through reenactment study in [1][2] that eradication coding method can decrease fluctuation of packet Delivery postpone and most pessimistic scenario delay in MANETs with sharp directing. By consolidating probabilistic routing and deletion coding, a novel directing protocol was proposed in [3] to enhance packet Delivery delay execution in deft MANETs. Hanbali et al. [4] built up a straightforward hypothetical model to break down postponement execution under two-bounce hand-off and eradication coding in an exceptionally basic system situation, where there is stand out source-destination pair and the source node has one and only single packet to be conveyed. Likewise, a straightforward coding method was considered [4], in which a solitary packet (message) is initially isolated into numerous pieces and these squares are then encoded into code hinders for transmission. Later, Liu et al. [5] extended the work in [4] to a more broad system situation with numerous source-destination sets. As of late,

Chen et al. [6] attempted to consolidate deletion coding and packet excess systems for enhancing delay execution in exceptional MANETs, where obstruction among concurrent transmissions is ignored. Additionally, just reenactment results are given in [6] to execution assessment.

Applying packet excess strategy for the investigation of packet Delivery delay in MANETs has been investigated under different portability models, as under the i.i.d. versatility model in [7], under the Brownian portability in [8], and additionally under the cross breed irregular walk model and discrete arbitrary heading model in [9]. Delay execution displaying under packet excess method has likewise been broadly concentrated as of late. The work [10][11][12] led delay demonstrating under a basic system situation, where stand out source-destination pair is accessible in the system. Later, Liu et al. [13][14] investigated delay displaying under more broad system situations with different source-destination sets.

As of late, a ton of exploration endeavors have been dedicated to the investigation of packet Delivery delay embracing packet excess procedure in DTNs (delay tolerant systems), an exceptional class of meager MANETs where impedance among transmissions can be dismissed. Spyropoulos et al. [15] proposed a solitary period routing protocol (called splash and hold up) for the investigation of delay execution in DTNs, and Bulut et al. [16] augmented the protocol in [15] and further proposed a more broad multi-period showering protocol in DTNs. Panagakakis et al. [10] built up a hypothetical system for delay displaying in DTNs with packet excess. The previously stated work on the investigation of packet Delivery delay in MANETs principally receives deletion coding and packet excess methods independently. Not the same as existing work, we propose a Markov tie based hypothetical model to scientifically concentrate on packet Delivery execution in MANETs with a mix of deletion coding and packet excess, which has an adaptable exchange off between packet Delivery delay packet directing. It is remarkable that the general routing protocol covers accessible and delay change. Here, we embrace a general two-bounce transfer routing protocol for directing protocols with immaculate eradication coding, e.g., [17][18], or unadulterated packet excess, e.g., [7][19], as extraordinary cases.

II. SYSTEM ASSUMPTIONS AND PERFORMANCE METRICS

Packet Delivery delay in MANETs is basic to bolster unicast-escalated applications in such systems. To think about the packet Delivery delay in MANTEs with deletion coding and packet repetition, this part proposes a discrete time multi-dimensional Markov affix model to dequeuate the packet Delivery process under a general directing protocol embraced in our study, where a gathering of x packets at source node are initially encoded into g ($x \cdot r$) encoded packets utilizing eradication coding, and each encoded packet is then conveyed to at most f particular transfer nodes, which is called f -cast hand-off here. Taking into account this Markov chain model, explanatory expressions are further inferred for the mean and change of packet Delivery delay.

In this area, we first present the activity design, then presents a two-jump hand-off protocol with deletion coding and packet excess, lastly give the meaning of packet Delivery delay embraced in our study.

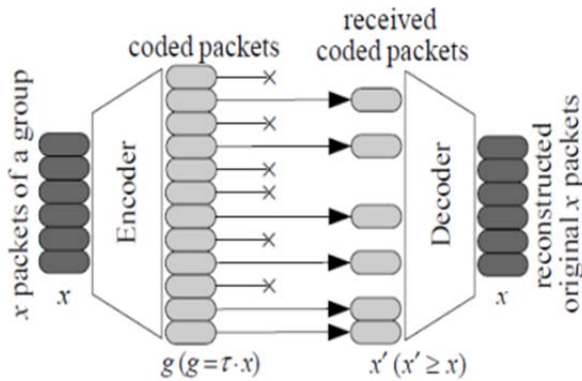


Figure 1: Illustration of Erasure Coding with Replication Factor $r \geq 1$

A. Traffic Pattern

We consider the generally utilized stage activity design [5][20][21], where every node is the wellspring of one stream and the destination of another stream. Here, one stream relates to one source-destination (S-D) pair. Without loss of all inclusive statement, we accept n source-destination sets are as per the following: $1 \rightarrow 2, \dots, i \rightarrow i + 1, \dots, n \rightarrow 1$, where the destination of node i is node $i + 1$, and the destination of node n is node 1. We expect that the aggregate number of bits that can be transmitted between a node pair is standardized as one packet for every time space. We facilitate accept that there are no requirements of nodes' cushion size and packet misfortune.

B. Two Hop Relay Routing Algorithm with Erasure Coding and Packet Delivery

To better comprehend the considered routing protocol, we first present eradication coding procedure. The fundamental thought of deletion coding with replication variable $r \geq 1$ is appeared in Figure 1, where a coding gathering of x packets at source node are initially encoded into $(g = r \cdot x)$ parallel measured coded packets, and these x packets can then be decoded at destination node when $x' \geq x$ particular coded packets are gotten [1].

We utilize one straightforward sample here to dequeuate the fundamental encoding and translating forms in deletion coding. For a coding bunch $(s1, s2, s3)^T$ of three packets $s1, s2$ and $s3$, we encode them into six coded packets $(c1, c2, \dots, c6)^T$ with replication element $r = 2$ as

$$(c_1, c_2, \dots, c_6)^T = G \cdot (s_1, s_2, s_3)^T \quad (1)$$

here G is a 6-by-3 generator framework of the eradication coding. Assume that coded packets $c2, c3$ and $c5$ have been gotten at destination node, then we have

$$(c_2, c_3, c_5)^T = G' \cdot (s_1, s_2, s_3)^T, \quad (2)$$

where G' is a 3-by-3 sub framework made out of the 2th, 3th and fifth columns of network G . In view of the property of G that a sub lattice made out of any of its 3 columns will be an invertible network [22], we realize that G' is invertible. In this manner, the first packets $s1, s2$ and $s3$ can then be decoded as

$$(s_1, s_2, s_3)^T = (G')^{-1} \cdot (c_2, c_3, c_5)^T \quad (3)$$

Without loss of all inclusive statement, we concentrate on one source-destination pair with source node S and destination node D in our discourse. Figure 2 demonstrates the system of the directing protocol, including the procedures of eradication coding, packet Delivery and interpreting. For a predefined coding aggregate, the source node S first encodes x packets into different unmistakable coded packets, and after that S will disperse excess duplicates for each coded packet (e.g., coded packet P) to at most f particular transfer nodes, and these hand-off nodes (likewise source node S) will at long last convey each coded packet to the destination node D . In the wake of getting x particular coded packets of the coding bunch, D can at last decoded the packets bunch. To disentangle the investigation, we expect that every transfer node will convey at most one coded packet for a specific coding bunch.

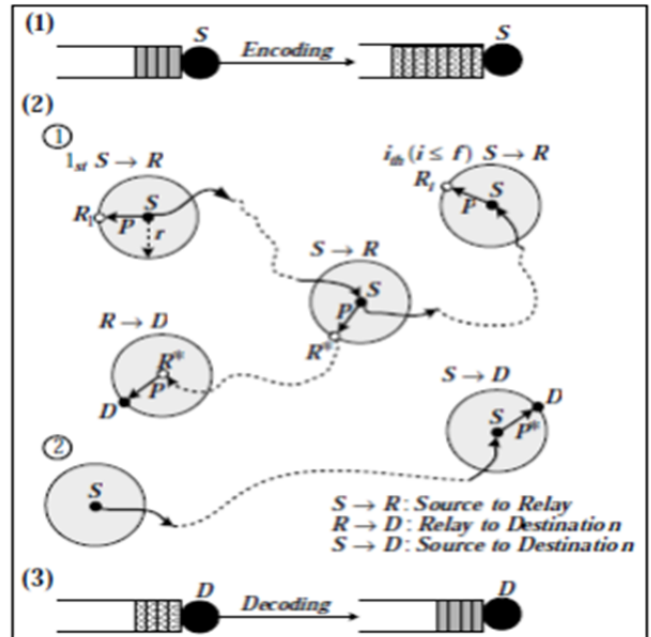


Figure 2: Illustration of the routing algorithm for a tagged source-destination pair. (1) and (3) denote the encoding and decoding processes at S and D , respectively. (2) denotes the packet delivery process, where 1 illustrates that S is transmitting coded packet P to D with the help of relay nodes; 2 illustrates that S is directly transmitting coded packet P^* to D

Before introducing the routing algorithm, we first define the following terms.

- New coded packet and non-new coded packet: A coded packet is known as another coded packet on the off chance that it has not been gotten yet by its destination; else, it is a non-new coded packet.
- Utilized transfer node and unutilized hand-off node: A hand-off node is known as a used hand-off node of a predefined coding bunch on the off chance that it conveys another coded packet of the coding bunch; else, it is called an unutilized hand-off node.
- Local-queue: S keeps up a nearby queue to store coded packets of the packets produced at S, which will be duplicated to transfer nodes later.
- Backup-queue: S keeps up a reinforcement queue to store its coded packets whose f duplicates have been conveyed yet their gathering at D has not been affirmed yet.
- Relay-queue: S (as a transfer node) additionally keeps up $n - 2$ hand-off queues for other $n-2$ source-destination sets to store their coded packets (one queue for every source-destination pair).

In view of above definitions, the considered directing protocol is abridged in Algorithm 1. Notice that in the above transfer to-destination transmission, node S goes about as a hand-off that advances coded packets to destinations for other $n-2$ source-destination sets. With respect to movement model in the directing protocol, there exist in complete n streams, each of which compares to one source-destination pair, subsequent to there are n versatile nodes in the system and every node is the wellspring of one stream and the destination of another stream. Every node can be a potential hand-off for other $n - 2$ streams (aside from the two streams began from and bound for itself).

Algorithm 1: Routing Algorithm

Encoding: Source S encodes a gathering of x packets into $\tau \cdot x$ coded packets that are put away into its nearby queue.

Delivery:

Step 1: if S gets a transmission opportunity at once opening then

Step 2: if D is inside the transmission scope of S then

Step 3: S executes Procedure 1;

Step 4: end

Step 5: S chooses to perform source-to-transfer transmission or hand-off to-destination transmission with equivalent likelihood;

Step 6: if S plans a source-to-transfer transmission then

Step 7: S executes Procedure 2;

Step 8: else if S plans a transfer to-destination then

Step 9: S executes Procedure 3;

Step 10: end if

Step 11: end if

Step 12: end if

Disentangling: Destination D will decipher the gathering of x packets when it gets x unmistakable coded packets of the gathering;

Procedure 1: Source to Destination Transmission

1. S starts a handshake to check which coded packets of the coding bunch have been gotten by D.

2. in the event that the head-of-queue coded packet Ph in neighborhood queue is another coded packet then

3. S transmits Ph to D;

4. else if there exists another coded packet holding up behind Ph in neighborhood queue then

5. S transmits the coded packet to D;

6. else if there exists another coded packet in reinforcement queue of S then

7. S transmits the coded packet to D;

8. end if

S erases all the non-new coded packets in its nearby queue and reinforcement queue;

It is prominent that with routing protocol, packets of a coding gathering are initially encoded together as encoded packets, so basically they are dispatched from S in the meantime furthermore they are gotten by D in the meantime (i.e., when x unmistakable coded packets are gotten). Accordingly, every packet of a coding bunch encounters the same Delivery delay characterized previously.

Procedure 2: Source to Relay Transmission

1. S arbitrarily chooses a node as transfer node R inside its transmission range;

2. on the off chance that R is an unutilized hand-off node then

3. S transmits a duplicate of head-of-queue coded packet Ph in its nearby queue to R;

4. on the off chance that f duplicates of Ph have as of now been conveyed out then

5. S puts Ph to the end of its reinforcement queue, and after that advances remaining coded packets in its nearby queue;

6. end if

7. else

8. S keeps unmoving as of now opening;

9. end if

Procedure 3: Relay to Destination Transmission

1. S haphazardly chooses a node as destination node V inside its transmission range;

2. S starts a handshake to check which coded packets of the coding gather that V is asking for have been gotten by V .

3. on the off chance that there exists another coded packet of the coding bunch in its hand-off queue indicated for V then

4. S transmits the coded packet to V ;

5. else

6. S keeps unmoving as of now opening;

7. end if

S erases all non-new coded packets bound for V from its transfer queue.

C. Performance Metrics

Delivery Delay: For a predetermined coding assemble, the Delivery postponement of a packet in it is characterized as the time term beginning from the time space when source S begins to recreate the initially coded packet of the gathering to the time opening when destination D has gotten x unmistakable coded packets of the gathering.

III. MARKOV CHAIN MODEL

To dequeue the packet Delivery process under the considered routing protocol, we embrace a three-tuple (i, j, k) to signify general transient state for coded packets of a coding gathering, where source S is conveying the j th $(1 \leq j \leq f)$ duplicate of the i th $(1 \leq i \leq \tau \cdot x)$ coded packet of the gathering, and destination D has gotten k $(0 \leq k < x, k \leq i)$ of $\tau \cdot x$ coded packets. We promote use to $(*, *, k)$ to indicate the transient express that S has officially wrapped up all duplicates of $\tau \cdot x$ coded packets while D has just gotten k $(0 \leq k < x)$ particular coded packets of them. Assume that present transient state is (i, j, k) , in light of this considered directing protocol we can see that one and only of the accompanying four transmission cases will happen in whenever space.

- SR case: Source-to-hand-off transmission, i.e., S effectively conveys the j th duplicate of the i th coded packet to an unutilized hand-off node. As appeared in Figure 3(a), under the SR case, the state (i, j, k) can travel to any of its three neighboring states relying upon records i and j .
- RD case: Relay-to-destination transmission, i.e., a helping-node effectively conveys another coded packet to D. As appeared in Figure 3(b), under the RD case, the state (i, j, k) can just travel to state $(i, j, k + 1)$.
- SR+RD case: Both source-to-hand-off transmission and hand-off to-destination transmission happen all the while. As appeared in Figure 3(c), under the SR + RD case, the state (i, j, k) can travel to any condition of $(i, j + 1, k + 1)$, $(i + 1, 1, k + 1)$ and $(*, *, k + 1)$.
- SD case: Source-to-destination transmission, i.e., S effectively conveys another coded packet to D. As appeared in Figure 3(d), under the SD case, the state (i, j, k) can travel to any of states $(i + 1, 1, k + 1)$, $(i + 2, 1, k + 1)$ and $(*, *, k + 1)$, contingent upon records i and k .

Notice that the source S dependably conveys out coded packet successively, along these queues a coded packet conveyed out before from its source S will be likely gotten ahead of schedule at its destination D. To rearrange the investigation, under the SD case we accept that for the transient state (i, j, k) with $k < i < \tau \cdot x$, S is conveying the i th coded packet yet short of what i unmistakable coded packets have been gotten by D. In this manner, under the SD case in Fig.4-3(d), the transient state (i, j, k) will dependably travel to the state $(i + 1, 1, k + 1)$ when $k < i < \tau \cdot x$.

In view of the transient states in Figure 3, the packet Delivery process under the considered routing protocol can be portrayed by a discrete time multi-dimensional Markov chain model appeared in Figure 4, where An indicates the engrossing state that destination D has gotten x particular coded packets of the predetermined coding bunch.

As illustrated in Figure 4, we denote by τ the total number of transient states in the Markov chain model, then τ is determined as

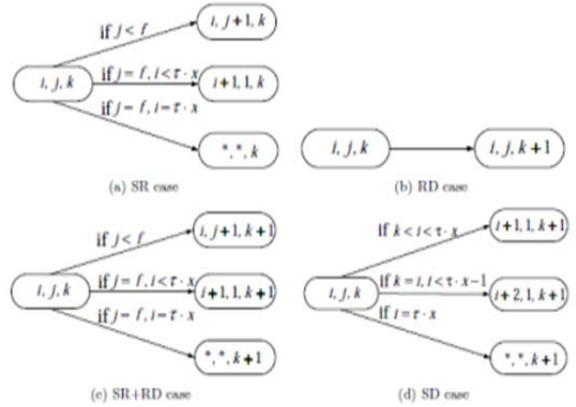
$$\beta = (2 \tau x^2 - x^2 + 3x - 2) \cdot f/2 + 1, \quad (4)$$


Figure 3: The transition diagrams of the state (i, j, k) , where $1 \leq i \leq \tau \cdot x$, $1 \leq j \leq f$, and $0 \leq k < x, k \leq i$.

where all β transient states are organized into x segments. We number these transient states successively as $1, 2, 3, \dots, \beta$, and number the engrossing state An as $_{\beta} + 1$, in a top-to-down and left-to-right way. Subsequently, the quantity of transient states ck in the k th section $(0 \leq k \leq x - 1)$ can be resolved as

$$c_k = \begin{cases} rx \cdot f + 1 & \text{if } k = 0 \\ (rx + 1 - k) & \text{if } 1 \leq k \leq x - 1 \end{cases}$$

For the l th transient state of the k th column in Figure 4, $l \in [1, ck]$, $k \in [0, x - 1]$, the number of utilized relay nodes u_h and the number of unutilized relay nodes u_c can be determined as:

When $k = 0$.

$$u_h = l - 1$$

$$u_c = n - l - 1$$

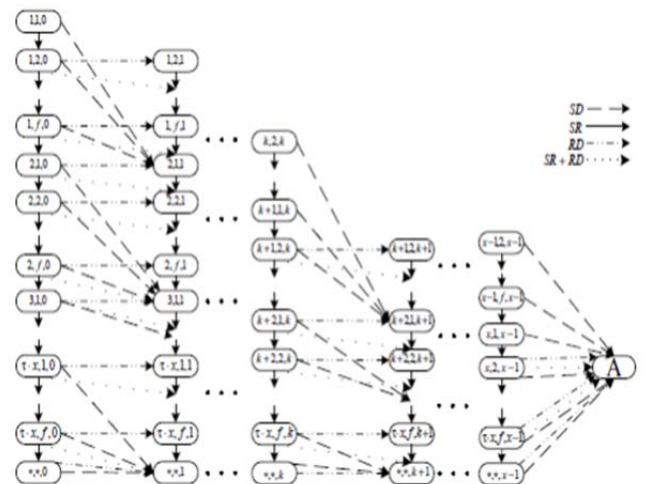


Figure 4: Absorbing Markov chain for the considered routing algorithm. For simplicity, the transition back to each transition state itself is not shown.

When $k \in [1, x - 1]$

$$u_h \approx \begin{cases} 0 & \text{if } l < f \\ l - f & \text{if } l \geq f \end{cases}$$

$$u_c \approx \begin{cases} n - 2 & \text{if } l < f \\ n - 2 - l + f & \text{if } l \geq f \end{cases}$$

IV. EXPERIMENTAL RESULT AND ANALYSIS

In this section, we first validate our theoretical models on expected packet delivery delay and delay variance, and then apply these models to illustrate how system parameters will affect the delay performance.

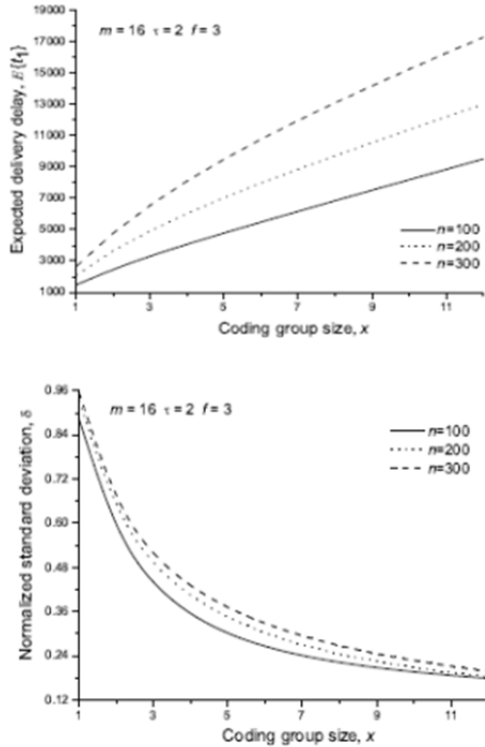


Figure 5: Delay Performance Vs Coding Group size x

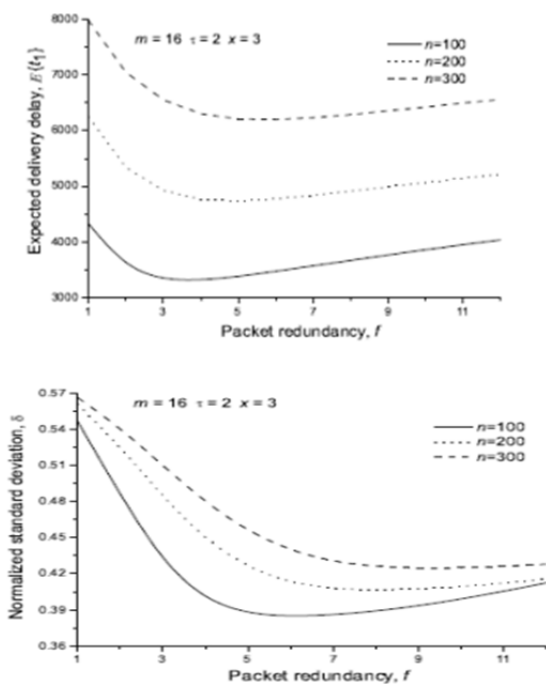


Figure 6: Delay Performance vs Packet Redundancy f

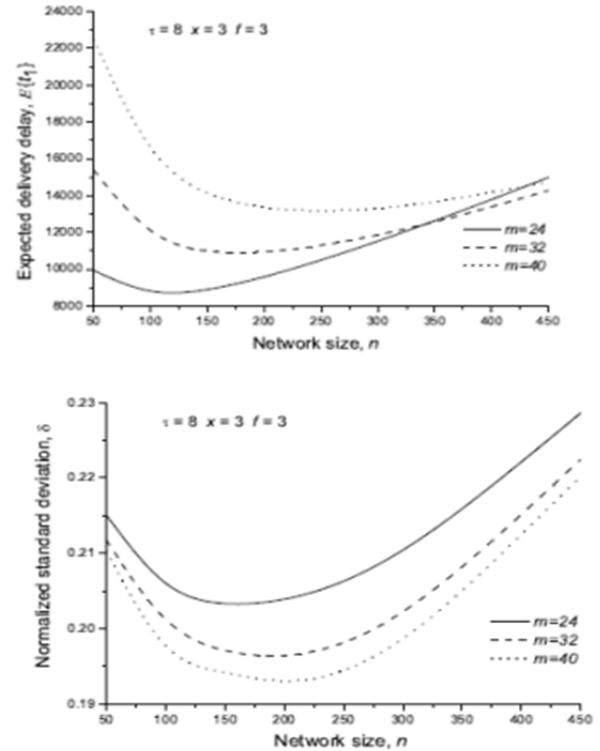


Figure 7: Delay Performance vs Network Size n

A. Traffic Pattern

We now investigate how the packet Delivery delay execution (δ , $E\{t_1\}$) of the considered routing protocol shifts with different parameters. With $n = \{100, 200, 300\}$, $m = 16$, $\tau = 2$ and $f = 3$, we look at in Figure 5 how $E\{t_1\}$ and δ change with coding bunch size x. One can see from Figure 5 that as x expands, $E\{t_1\}$ monotonically increments while comparing δ monotonically diminishes. For instance, for the setting of $n = 100$, the $E\{t_1\}$ (resp. δ) at $x = 3$ is 3317.71 (resp. 0.429), which is right around 0.61 (resp. 1.62) times that of $x = 6$. The outcomes in Figure 5 demonstrate through a legitimate control of coding gathering size x, an exchange off in the middle of $E\{t_1\}$ and δ can be introduced concurring distinctive delay (and difference) prerequisites of different applications.

For the situations of $n = \{100, 200, 300\}$, $m = 16$, $\tau = 2$ and $x = 3$, Figure 6 dequeues how $E\{t_1\}$ and δ fluctuate with packet excess f. It is anything but difficult to see from Figure 6 that for given situation, as f expands, the $E\{t_1\}$ (resp. δ) first dequeues and after that expansions, and there exists an ideal setting of f to accomplish the base $E\{t_1\}$ (resp. δ). For instance, for the case $n = 100$ in Figure 6, an insignificant $E\{t_1\}$ (resp. δ) of 3310.21 (resp. 0.384) is accomplished at $f = 4$ (resp. $f = 6$). An expansion in packet excess f has two-fold impacts on delay execution: on one hand, it builds the rate at which the destination gets a coded packet and along these queues diminishes packet delay; then again, it diminishes the velocity at which the source disseminates duplicates of a coded packet and in this manner expands packet delay. At the point when the main impact overwhelms the second one, $E\{t_1\}$ diminishes as f

increments; when the second impact rules the first, $E\{t_1\}$ increments as f further increments.

At long last, for the given setting of $m = \{24, 32, 40\}$, $\tau = 8$, $x = 3$ and $f = 3$, we appear in Fig. 7 how $E\{t_1\}$ and δ change with system size n . One can see from Figure 7 that for a given setting of m , we can locate a most appropriate system size n^* (and hence most reasonable normal node thickness n/m^2) to accomplish the base $E\{t_1\}$ (resp. δ). For instance, for the setting of $m = 24, 32$ and 40 , the most appropriate system size is $100, 150$ and 250 (resp. $150, 200$ and 200) for a base $E\{t_1\}$ (resp. δ). Really, an expansion in system size n has two-fold impacts on postponement execution: on one hand, it expands the rate at which a coded packet is conveyed and accordingly diminishes packet delay; then again, it diminishes the rate at which the destination gets a coded packet because of the negative impacts of obstruction and medium dispute issues and in this manner builds packet delay. At the point when the system is scanty, the main impact rules the second one, and in this manner $E\{t_1\}$ diminishes as n increments; when the system clients turn out to be generally thickly circulated, the second impact commands the first, and in this way $E\{t_1\}$ increments as n further increments.

V. CONCLUSIONS

To think about the postponement execution in MANETs, this part receives a general directing protocol by joining deletion coding and packet excess methods. Hypothetical models were further created to uncover the postponement execution under the considered directing protocol. Exploratory results show an adaptable exchange off between expected Delivery defer and postpone fluctuation can be gotten through a legitimate setting of coding gathering size x , replication variable τ and packet excess f . It is normal that the delay execution study can encourage different applications with various prerequisites on postponement and delay change in future MANETs.

REFERENCES

- [1] Y. Wang, S. Jain, M. Martonosi, and K. Fall. Erasure-coding based routing for opportunistic networks. In WDTN, 2005.
- [2] Y. Liao, K. Tan, Z. Zhang, and L. Gao. Estimation based erasure coding routing in delay tolerant networks. In IWCMC, 2006.
- [3] F. Tsapeli and V. Tsaoussidis. Routing for opportunistic networks based on probabilistic erasure coding. In WWIC, 2012.
- [4] A. A. Hanbali, A. A. Kherani, and P. Nain. Simple models for the performance evaluation of a class of two-hop relay protocols. In IFIP Netw., 2007.
- [5] J. Liu, X. Jiang, H. Nishiyama, and N. Kato. Performance modeling for two-hop relay with erasure coding in MANETs. In Globecom, 2011.
- [6] L.-J. Chen, C.-H. Yu, T. Sun, Y.-C. Chen, and H. Hua Chu. A hybrid routing approach for opportunistic networks. In ACM SIGCOMM., 2006.
- [7] M. J. Neely and E. Modiano. Capacity and delay tradeoffs for ad-hoc mobile networks. IEEE Trans. Inf. Theory, 51(6):1917–1936, Jun. 2005.
- [8] G. Sharma and R. Mazumdar. On achievable delay/capacity tradeoffs in mobile ad hoc networks. In WiOpt, 2004.
- [9] G. Sharma, R. Mazumdar, and N. Shroff. Delay and capacity tradeoffs in mobile ad hoc networks: A global perspective. IEEE/ACM Transactions on Networking, 15(5):981–992, October 2007.
- [10] A. Panagakakis, A. Vaios, and I. Stavrakakis. Study of two-hop message spreading in DTNs. In WiOpt, 2007.
- [11] R. Groenevelt, P. Nain, and G. Koole. The message delay in mobile ad hoc networks. Performance Evaluation, 62(1-4):210–228, Oct. 2005
- [12] A. A. Hanbali, P. Nain, and E. Altman. Performance of ad hoc networks with two-hop relay routing and limited packet lifetime-extended version. Performance Evaluation, 65(6-7):463–483, Jun. 2008
- [13] J. Liu, X. Jiang, H. Nishiyama, and N. Kato. Delay and capacity in ad hoc mobile networks with f-cast relay algorithms. In ICC, 2011.
- [14] J. Liu, X. Jiang, H. Nishiyama, and N. Kato. Generalized two-hop relay for flexible delay control in MANETs. IEEE/ACM Trans. Netw., 20(6):1950–1963, Dec. 2013
- [15] T. Spyropoulos, K. Psounis, and C. S. Raghavendra. Spray and wait: An efficient routing scheme for intermittently connected mobile networks. In ACM SIGCOMM Workshop, 2005.
- [16] E. Bulut, Z. Wang, and B. K. Szymanski. cost effective multi-period spraying for routing in delay tolerant networks. IEEE/ACM Trans. Netw., 18(5):1530–1543, Oct. 2010.
- [17] E. Altman and F. D. Pellegrini. Forward correction and fountain codes in delay-tolerant networks. IEEE/ACM Trans. Netw., 19(1):1–13, Feb. 2011.
- [18] Z. Kong, E. M. Yeh, and E. Soljanin. Coding improves the throughput-delay tradeoff in mobile wireless networks. IEEE Trans. Inf. Theory, 58(11):6894–6906, Nov. 2012.
- [19] J. Liu, X. Jiang, H. Nishiyama, and N. Kato. Delay and capacity in ad hoc mobile networks with f-cast relay algorithms. IEEE Trans. Wirel. Commun., 10(8):2738–2751, August 2011.
- [20] D. Ciullo, V. Martina, M. Garetto, and E. Leonardi. Impact of correlated mobility on delay-throughput performance in mobile ad-hoc networks. In INFOCOM, 2010.
- [21] M. Garetto, P. Giaccone, and E. Leonardi. Capacity scaling in ad hoc networks with heterogeneous mobile nodes: The subcritical regime. IEEE/ACM Trans Netw., 17(6):1888C–1901, Dec. 2009.
- [22] L. Rizzo. Effective erasure codes for reliable computer communication protocols. Computer Communication Review, 27(2):24C–36, Apr. 1997